





### ENGINE

Туре	ORA	Stage V / T4f
Engine		CAT C 7.1
Power		205 KW / 275 HP
Displacement		7 l
Max. torque	1050 Nm	1257 Nm
Fuel tank		360 l (95 gal)
Urea tank	N/A	AdBlue 26 l
		(6.8 gal)

## TRANSMISSION

Hydraulic pumps and motorsBosch RexrothHydraulic tank56 l (14.8 gal)Max. speed10 km/h (6.21 mph)

## UNDERCARRIAGE

Undercarriage type		rubber track
Grouser	Total width	Track width

.....

(mm/in) 700/27.6 
 Iotal width
 Irack width

 (mm/in)
 (mm/in)

 2450/96.5
 1750/68.9

# OPTIONS

Winch Over pressure system Arctic Package GPS Auxiliary heating LED working lights Rear-view camera Fire extinguishing system etc.

#### ATTACHMENTS

 PTO:

 M550m
 2050 kg (4519 lbs)


 Rotor
 52 x UPTs / 56 x BCS

 Working width
 2110 mm (83.1 in)

 Total width
 2500 mm (98.4 in)

### WEIGHT AND MOBILITY

Weight with M550m Weight without Mulcher	14610 kg (33210 lbs) 12560 kg (27690 lbs)
Ground pressure: 700 mm (27.6 in) grouser	265 g/cm² (3.77 psi)
Gradeability sideways Gradeability frontal	30° 45°

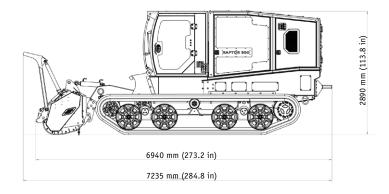

# **TECHNICAL DATA**

rinoth

2500 mm (98.4 in)

As of 02/2020. Technical data are dependent on equipment and may vary. The images may contain additional options which do not belong to the standard scope of delivery. PRINOTH reserves the right to make amendments and updates at any time without prior notice. PRINOTH®, CAT® and Bosch Rexroth® are registered trademarks.